



Multifunction Hinge screw.

OS-HB Lock Screw

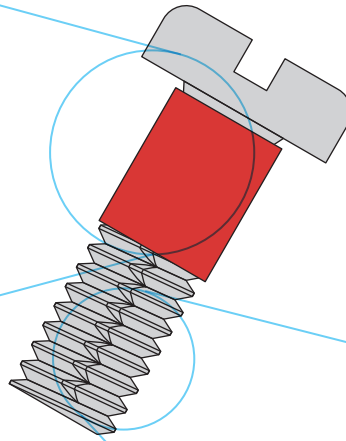

Two dots on the head is a mark of the OS Lock function.


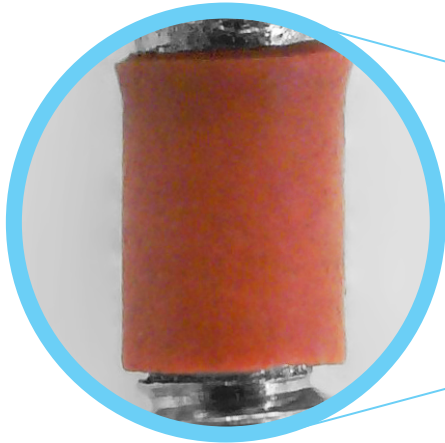


OS Lock function

OS Lock stands for "Optical Safety Lock". When axial tension is applied to the threads after the screw has been set, the projections in the flanks deform the flanks of the internal threads and bite down. No need to take the conventional method as adding resin process for Anti-looseness.

Resin pipe

Polyolefin resin fit in hinge and prevent screws dropping off. It also gives smooth open-close movement of temples.

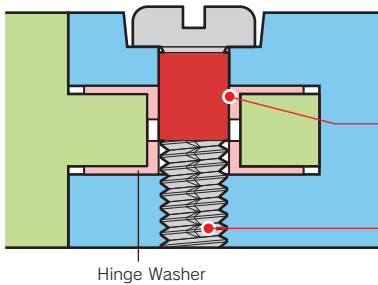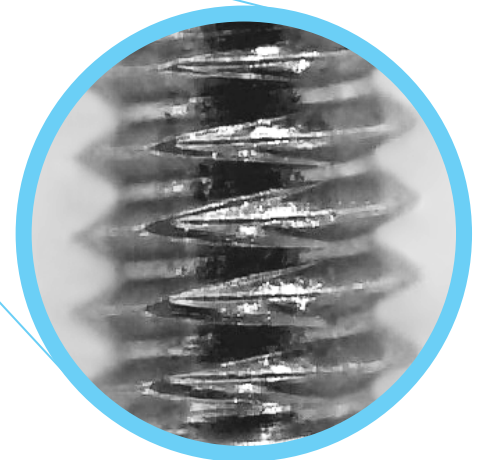


Resin pipe to prevent rattling. Can be used for repairing the loosen temple!

OS Lock function reduces screw looseness!

Hinge Washer

Regular size in stock



Screw type	Half thread
Head type	Round head
Recess type	±
Tip type	Cup point

Diameter (d1)	Diameter (D)	Height (H)	Length (L)
M1.4	2.0	0.6	2.2
			2.4
			2.6
			2.8
			3.0
			3.2
			3.4
			3.6
			3.8
			4.0
			4.2