


Two functions

Pad screw that is resistant to fall off.


OS-W Lock Screw

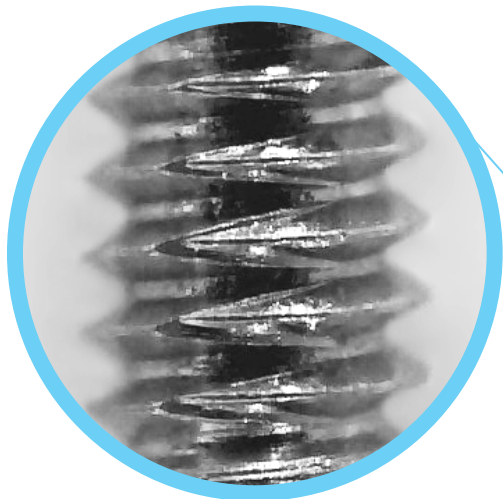

Anti-falling effect

Wedge function

Six wedge-shaped protrusions on the head seating face ensure to capture the holes in the clings.

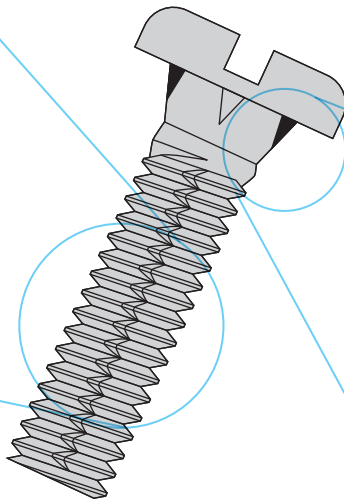

Locks fast and will not let go! OS Lock function


OS Lock stands for "Optical Safety Lock". When axial tension is applied to the threads after the screw has been set, the projections in the flanks deform the flanks of the internal threads and bite down. No need to take the conventional method as adding resin process for Anti-looseness.




Two dots on the head is a mark of the OS lock function.

Wigs fit in a clings hole with a wedge function

Firmly fixes to internal thread with OS lock function



Regular size in stock

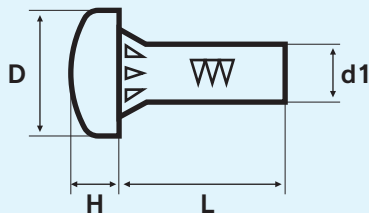

| | |
|-------------|-------------|
| Screw type | Full thread |
| Head type | Round head |
| Recess type | ± |
| Tip type | Cup point |

| Diameter (d1) | Diameter (D) | Height (H) | Length (L) |
|---------------|--------------|------------|------------|
| M1.0 | 1.8 | 0.5 | 3.8 |
| M1.2 | 2.0 | 0.5 | 3.8 |

• Screws other than those listed above are also available. Please feel free to contact us.