


Locks fast
and will not
let go!

Universal screw that exerts loosening prevention effect by male screw alone.

OS Lock Screw(s)


- Can be used repeatedly.
- There is no worry of deterioration like a resin processing screw.

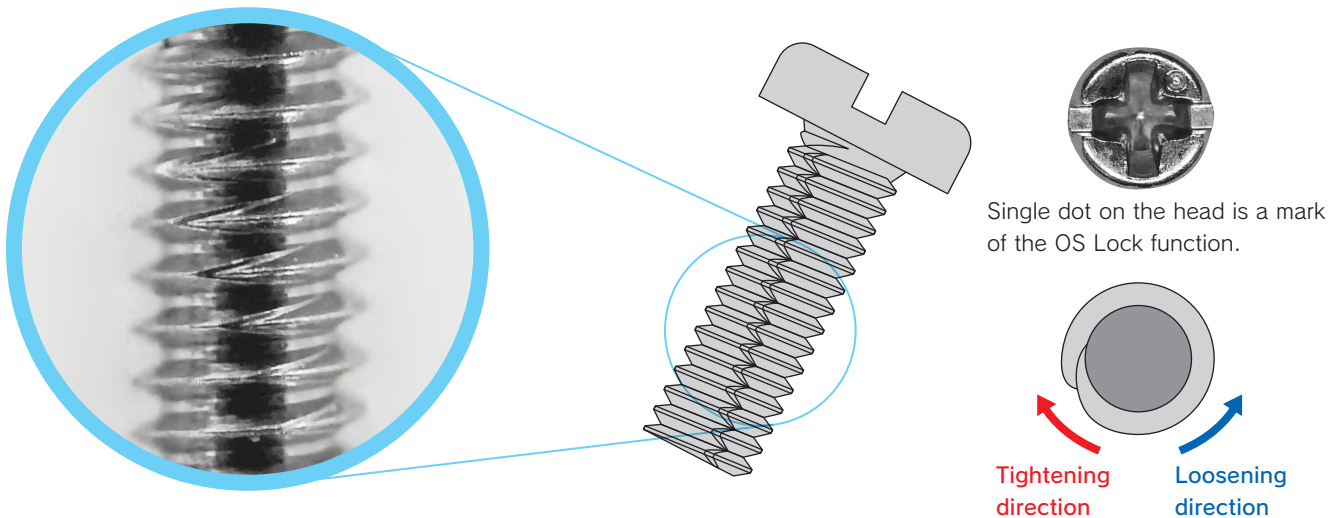

OS Lock function

OS Lock stands for "Optical Safety Lock". When axial tension is applied to the threads after the screw has been set, the projections in the flanks deform the flanks of the internal threads and bite down. No need to take the conventional method as adding resin process for Anti-looseness.

Regular size in stock

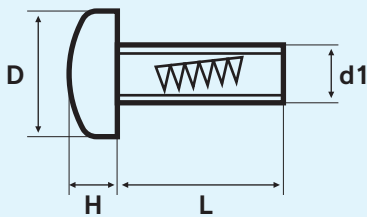

Screw type	Full thread
Head type	Round head
Recess type	±
Tip type	Cup point

Diameter (d1)	Diameter (D)	Height (H)	Length (L)
M1.0	2.0	0.6	3.8
M1.2	2.0	0.5	3.8
M1.4	2.0	0.6	2.0
			2.2
			2.4
			2.6
			2.8
			3.0
			3.2
			3.4
			3.6
			3.8
4.0			
4.2			

• Screws other than those listed above are also available. Please feel free to contact us.